


EASYMOD AD-070U SERIES SWITCHERS

70 watts - 3" x 5" - Single to Quad Output

IF WHAT YOU WANT IS WHAT YOU NEVER GET IN AC INPUT SWITCHERS, the POWER SOLUTION for up to 70 watts steady state of high reliability, Universal AC input power can be found in the AD-70 family of 3" x 5" PC Card EASYMOD switchers. These models are available in a complete range of single to quad output configurations from 1.5 to >48VDC. Most models deliver 70W (75W peak) of highly regulated output power. This family built, on double sided FR-4 circuit boards with plated through holes, has on-board Class B EMI filtering, is EN61000-3-2 compliant, CE certified and delivers continuous full power output to 50°C, and is capable of operation up to 70°C.

EASYMOD simply means: IF WHAT YOU SEE IS WHAT YOU DON'T WANT, IT CAN BE EASILY CHANGED. EASYMODS include; extended temperature operating range, isolated outputs, unique output combinations, available DC inputs, remote sense, low noise versions, unique cables and harnesses and much, much more. All these modifications are available at nominal (if any) additional cost, and normally without any impact on safety agency approvals which reduces both development cost and time to market. An EASYMOD can be performed on supplies for programs requiring as few as 250 units.

Call EASYMOD Support on (U.S.) +1-954-346-2442 or (U.K.) +44 (0)1903 768204 or email easymod@unipower-europe.com.

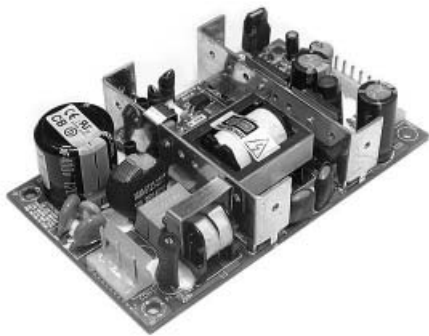

INPUT SPECIFICATION

Input Voltage47-63 Hz; 90-264 VAC
Power Factor Meets EN61000-3-2 Amendment 14
Inrush Current, Cold Start35A max
Input Current @ 115VAC 2.5A P- P
Fusing 3.15A @ 250 VAC On Board

OUTPUT SPECIFICATION

Continuous Output Power ⁵ 70 Watts
Holdup Time 16 mSec
Line Regulation Over Input Range; V1-V4 ± 0.2%
Load Regulation @ 60% 0% Full Load	
V1 - V2 ± 3%
V3 - V4 ± 5% max
Cross Regulation @ 60% 40% Full Load	
V1: Change in V2-V4 ± 0.5%
V2-V4: Change in V1 @75 25% F/L ± 5% max
Overshoot Protection V1 130% Vout typ
Overshoot, All Outputs 10% max
Power Limit Set @120% typ
Response Time ¹ 500 µSec
Ripple & Noise ³ @ 20 Mhz Band Width ; Full Load	
All Outputs 1% P-P max
Output Adjustment Range on V1 5% min

FEATURES & OPTIONS

- EN61000-3-2 COMPLIANT
- REMOTE SENSE AVAILABLE
- 1.5 -48 VDC OUTPUTS
- UP TO 4 OUTPUTS
- CB REPORT AVAILABLE
- UL- cUL; EN60950 APPROVALS
- UL-2601; IEC 601- AVAILABLE
- 40°C START-UP - OPTION
- 24 or 48 VDC INPUT AVAILABLE

GENERAL SPECIFICATION

Efficiency 75% typ
Switching Frequency 60KHz typ
Immunity See Note 6 Below
Operating Temperature Range ³ -20 to +70°C
Minimum Start-up Temperature ⁷ -20°C
Derating from 50-70°C 2.5%/°C
Storage Temperature -40 to +85°C
Cooling See Note 5
Relative Humidity; Non-Condensing 5 - 95%
Altitude 10,000 ft
EMI FCC Class B & VDE Class B
 CISPR 22; EN 55022 Class B; EN55024
Vibration ⁴ from 10-55Hz 1.0G Peak
MTBF per MIL 217 > 250,000 hours
Safety Agency Approvals UL & cUL 60950 & 2601;
 EN 60950; IEC 601-1; CE

Notes :

1. All outputs return within 1% of nominal for load change from 25-75% lo excursion.
2. See override for steady state and peak ratings for convection and forced air.
3. Ripple & noise may not meet published specifications for 2 min. after start-up below 0°C.
4. Three orthogonal axes @ 1 octave/min. 5 min. dwell @ four major resonances.
5. Rating with 30 CFM air; Rated at 50 watts convection.
6. Meets EN61000-4 -2; -3; -4; -5; -6; -8; -11 Level 3
7. -40°C start up option available
8. All specifications typical at nominal line, full load & 25°C, and are subject to change without notice.

EASYMOD is a Sales Mark of Power Solutions Inc.

www.unipowercorp.com or www.powercassette.com

EASYMOD AD-070U FAMILY

AVAILABLE STEADY STATE CURRENT ¹ @ 50°C AMBIENT

MULTIPLE OUTPUT MODELS / OUTPUT CURRENT / AMPS

OUTPUT	DC OUTPUT ¹	MINIMUM	MAXIMUM ³	MAXIMUM ⁴	PEAK ^{4,5}
V1	1.5 to 48 ⁷ V	0.5 ²	8	9	10
V2	1.5 to 48 ⁸ V	0.5 ²	4	4	5
V3	1.5 to 48 ⁸ V	0.25	2	2.5	2.5
V4	1.5 to 48 ⁸ V	0.25	2	2.5	2.5

SINGLE OUTPUT MODELS (1.5 to 48VDC ^{7,11}) / OUTPUT CURRENT / AMPS

OUTPUT CURRENT	1.5V ~ 3.3V	5V	12V	15V	24V	48V
MINIMUM	0	0	0	0	0	0
MAXIMUM ³	12	12	5	4	2.5	1.25
MAXIMUM ⁴	14	14	5.9	4.6	3	1.4
PEAK ^{4,5}	15	15	6.5	5	3	1.5

- (1) Full power out on V3-V4 with minimal V1 and V2 loading--Option.
 (2) 10% minimum load for stated regulation on multiple O/P units.
 (3) Convection cooling.
 (4) 30CFM forced air cooling.
 (5) 30 seconds maximum duration.
 (6) Most output combinations from 2 to 48+ Volts possible; up to maximum rated Current / Power...Consult EASYMOD Support.

- (7) Specify 0.1V increments.
 (8) Specific output voltage is current dependent
 (9) Regulation may degrade under some output conditions. Consult EASYMOD Support.
 (10) Consult EASYMOD Support for Model #.
 (11) For outputs >48 Volts, consult EASYMOD Support.
 (12) Cover and custom sheet metal available.


MECHANICAL

CON 1:
 Molex 09-65 2058
 Mating: Molex 09-50-3051

PIN1 GROUND
 PIN2 KEY
 PIN3 NEUTRAL
 PIN4 KEY
 PIN5 LINE

CON 2:
 Molex 09-65-2088
 Mating: Molex 09-50-3081

PIN1 V2
 PIN2~PIN3 V1
 PIN4~PIN5 RET
 PIN6 V3
 PIN7 RET
 PIN8 V4

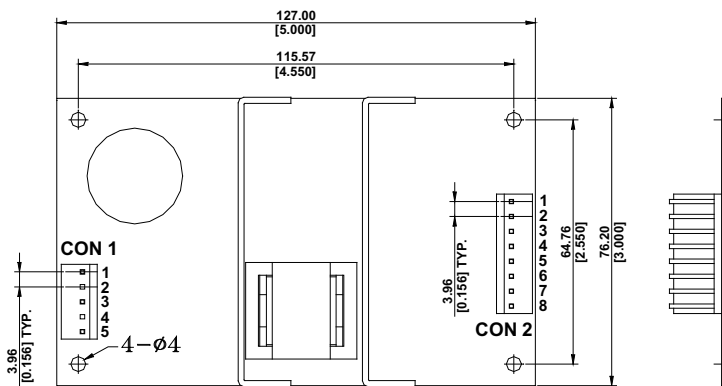

TOLERANCE: $\frac{\text{mm } +/-0.5}{\text{[inch]} +/-0.02}$

UNIT: $\frac{\text{mm}}{\text{[inch]}}$